




Caulk-Free Joints

CERACLAD's T-jointer Provides a Finished Appearance Without the Need for Caulking

Four Important Benefits of The CERACLAD Rainscreen System

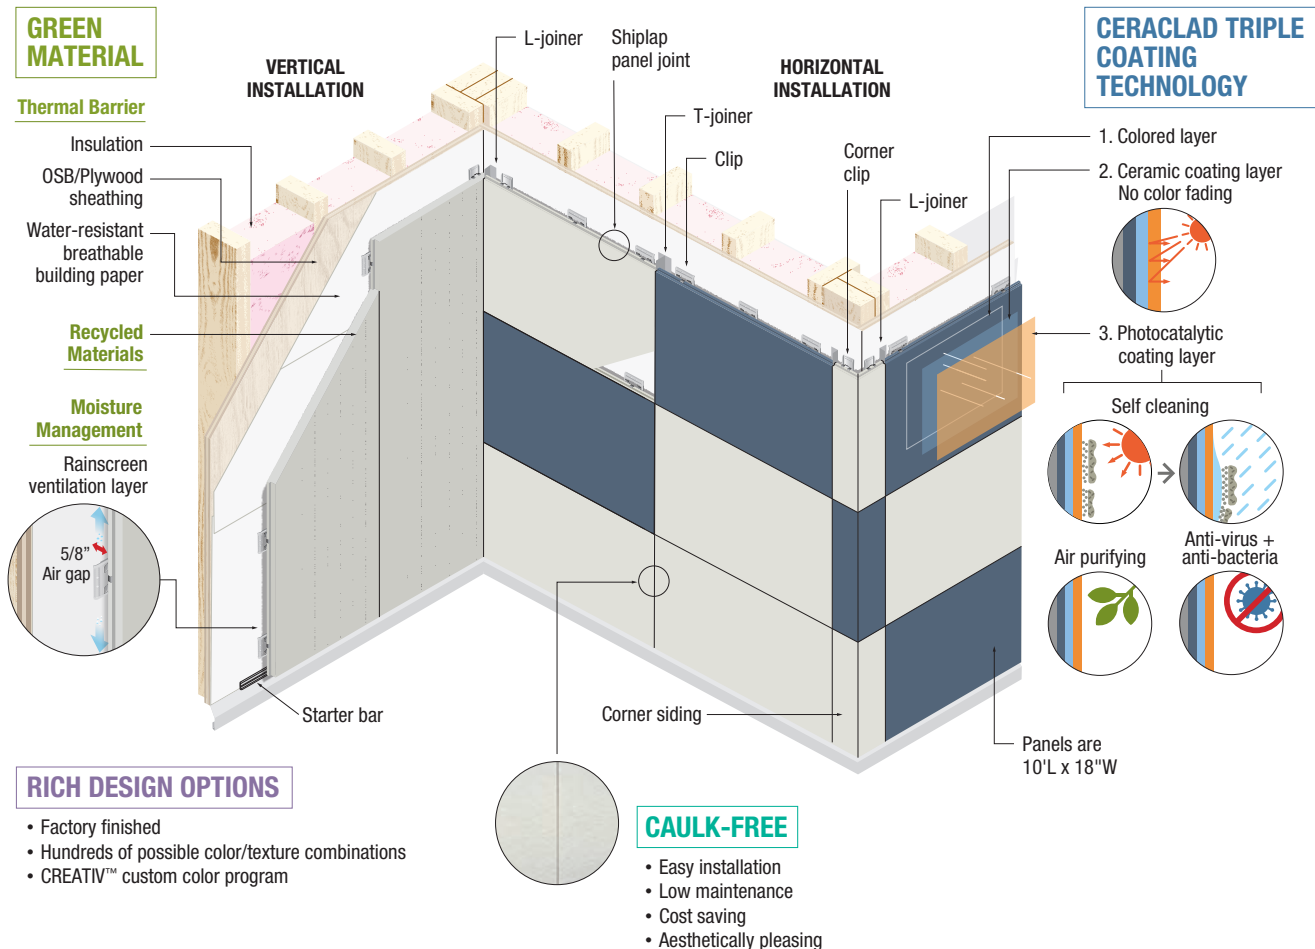

Virtually No Maintenance Needed

- 20 Years Fade Limited Warranty
- 365 Days of Self-Cleaning Panel Surface
- No Need to Replace the Caulking



CERACLAD Caulk-Free Features

- **Easy Installation**

Field fabrication/shop drawings are not required

- **Low Maintenance**

The panel surface is self-cleaning and with T-joint there's no need to replace the caulking

- **Cost Saving**

The CERACLAD provided T-jointer and accessories eliminate the need for caulking, saving time and money

- **Aesthetically Pleasing**

Clean sleek surface

NEW

Caulk-Free T-joint



CERACLAD's T-jointer and L-jointer Eliminate the Need for Caulking, Achieving a Clean Sleek Surface in a More Economical Way

NEW

Caulk-Free T-joint




Conventional Caulked Joint




CERACLAD T-joint Installation Quick Guide

Install the T-jointer butted to the panel and secure with screws every 16" o.c.; Install the panel clip so it does not overlap the T-jointer.

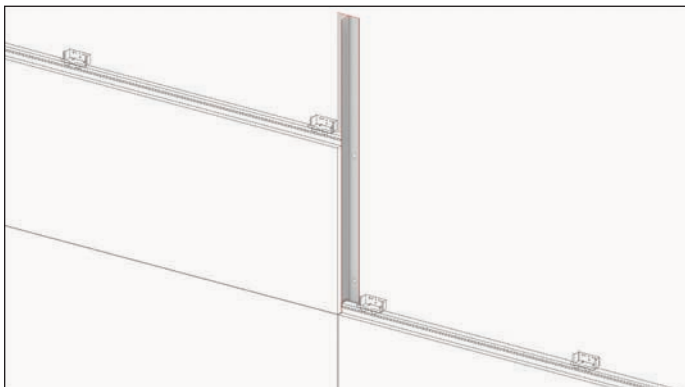



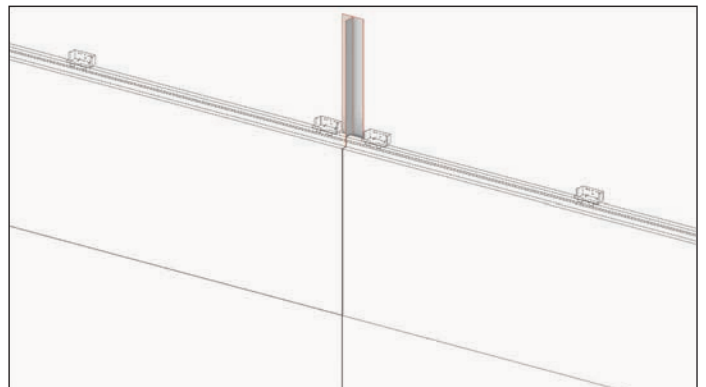



Continue to install panels butted to T-joint, fasten clips and repeat.




TIPS

- Panels should be cut with the back side up
- Use a panel saw or circular saw with a vacuum attachment to cut panels
- Cut panels straight using a straight edge, track saw or panel saw
- Clean cut panels by blowing dust away with compressed air or with a clean dry cloth
- Any surface chipping caused by the cut should be touched up with CERACLAD touch-up paint
- Apply CERACLAD recommended Cut Edge Sealer to the panel cut edges

T-joint Accessories		
Panel Clip	T-jointer	L-jointer
		
Touch-up Kit	Starter Bar	Cut Edge Sealer
		

Triple Coating Technology

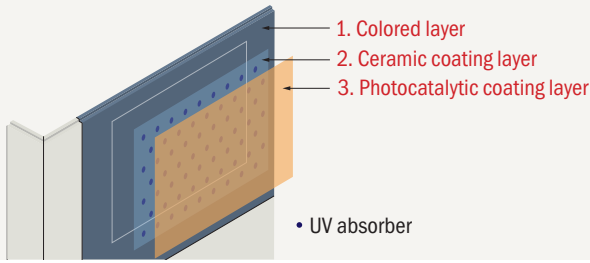

**20-Year Fade Limited Warranty
+ 365 Days of Self-Cleaning and Air Purifying**

Green Material

Recycled Materials

Consisting of approximately 45% recycled material, the panels are 100% recyclable, factory finished with no VOC, and contain no asbestos.



LIVING FUTURE
CORPORATE MEMBER

Rainscreen Moisture Management

Our exclusive technology combines a durable weather-resistant exterior with an internal ventilation layer that allows moisture to escape.



Product Description

CERACLAD is a fiber cement panel rain screen system manufactured by KMEW Co., Ltd. All panel products meet or exceed the standards of ASTM 1186 and ICC-ES AC-90. **CERACLAD** products are Type A, Grade I as defined in ASTM 1186.

FIRE AND COMBUSTIBILITY

Summary of Test Methods

US

ASTME84, ASTME119, NFPA285, NFPA268

Canada

ULC-S114, ULC-S135

TRANSVERSE LOADING

Consult ICC-ESR 1627 code compliance report for Allowable Transverse Loads (design pressure/ ASD) with 3.0 safety factor applied.

Design Options

CERACLAD siding panels also come in a wide range of rich textures and colors and provide you with hundreds of possible combinations. And our exclusive **CREATIV™** custom color program allows you to order your components in colors that will match your exact specifications.

15 Standard Colors



More Textures and Colors



Please visit ceraclad.com to see the latest textures and colors.

Our **CREATIV™** custom color program offers:

- Unlimited color choices
- Two factory applied finish coats
- Available in our most popular three textures:
 - Cashmere Smooth
 - 8 Reveal
 - Zen Garden

